


Pin 2



Pin 1

Pin 3



■ **FEATURES**

- Adopt FRED chip
- Low forward Voltage drop
- Fast reverse recovery time
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability

■ **TYPICAL APPLICATIONS**

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

■ **MECHANICAL DATA**

- **Package:** TO-252  
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

■ **MAXIMUM RATINGS** ( $T_a=25^{\circ}\text{C}$  Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MUR560D
Device marking code			MUR560D
Repetitive Peak Reverse Voltage	$V_{RRM}$	V	600
Average Rectified Output Current @60Hz sine wave, R-load, $T_c$ (FIG.1)	$I_o$	A	5
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, $T_a=25^{\circ}\text{C}$	$I_{FSM}$	A	50
Current Squared Time @1ms≤t≤8.3ms $T_j=25^{\circ}\text{C}$ ,	$I^2t$	A <sup>2</sup> s	10
Storage Temperature	$T_{stg}$	°C	-55 ~ +150
Junction Temperature	$T_j$	°C	-55 ~ +150
Junction capacitance @4V,1MHz	$C_j$	pF	20

■ **ELECTRICAL CHARACTERISTICS** ( $T_a=25^{\circ}\text{C}$  Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	Min	Typ	Max
Instantaneous forward voltage drop per diode	$V_{FM}$	V	$I_{FM}=5.0A$ @ $T_j=25^{\circ}\text{C}$	-	1.45	1.6
			$I_{FM}=5.0A$ @ $T_j=150^{\circ}\text{C}$	-	1.15	1.3
DC reverse current at rated DC blocking voltage per diode	$I_{RRM1}$	uA	$V_{RM}=V_{RRM}$ $T_j=25^{\circ}\text{C}$	-	-	10
	$I_{RRM2}$		$V_{RM}=V_{RRM}$ $T_j=150^{\circ}\text{C}$	-	35	200
Reverse Recovery Time	$T_{RR}$	ns	$I_F=0.5A$ $I_{RM}=1A$ $I_{RR}=0.25A$ $T_j=25^{\circ}\text{C}$	-	25	35
Peak recovery current	$I_{RRM}$	A	$T_j=25^{\circ}\text{C}$	-	3.06	-
			$T_j=125^{\circ}\text{C}$	-	5.07	-
Reverse recovery charge	$Q_{rr}$	nC	$T_j=25^{\circ}\text{C}$	-	78.88	-
			$T_j=125^{\circ}\text{C}$	-	280	-

■ **THERMAL CHARACTERISTICS** ( $T_a=25^\circ\text{C}$  Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	MUR560D
Thermal Resistance	Between junction and case	$R_{\theta J-C}$	$^\circ\text{C}/\text{W}$	5.0
	Between junction and Air	$R_{\theta J-A}$	$^\circ\text{C}/\text{W}$	50

■ **PACKAGING INFORMATION**

PREFERRED P/N	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MUR560D	Approximate 0.31	2500	2500	25000	Reel

■ **CHARACTERISTICS (TYPICAL)**

FIG1:  $I_o$  -  $T_c$  Curve

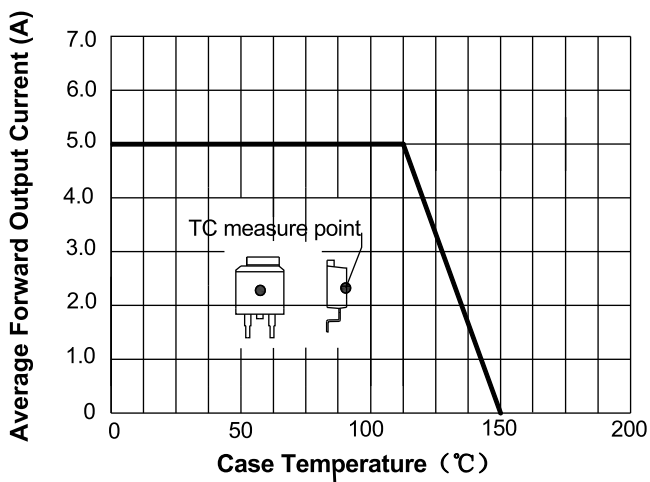


FIG2: Surge Forward Current Capability

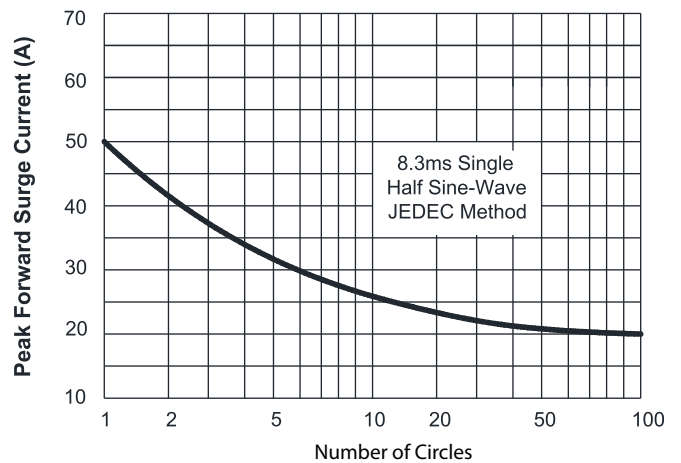


FIG3: Forward Voltage

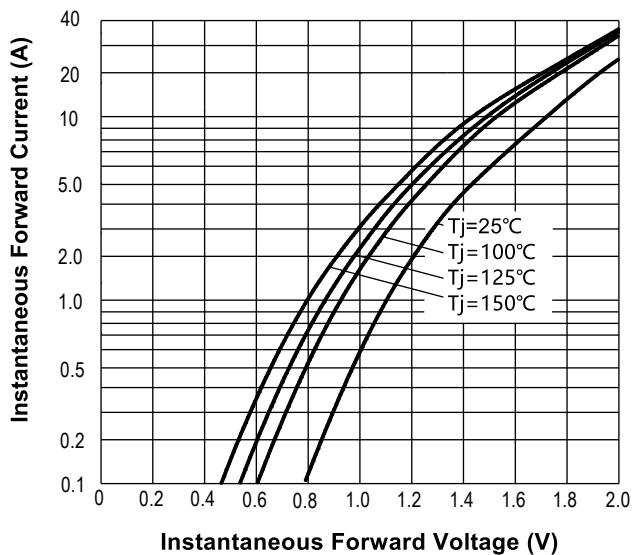


FIG4: Instantaneous Reverse Characteristics



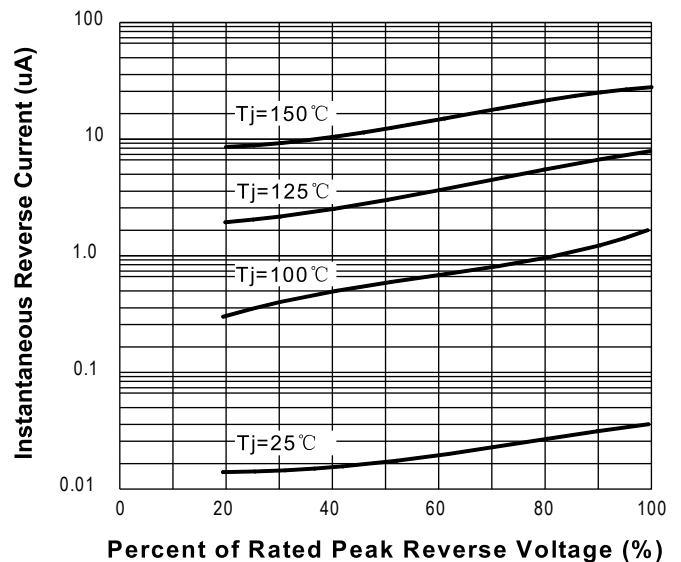


FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

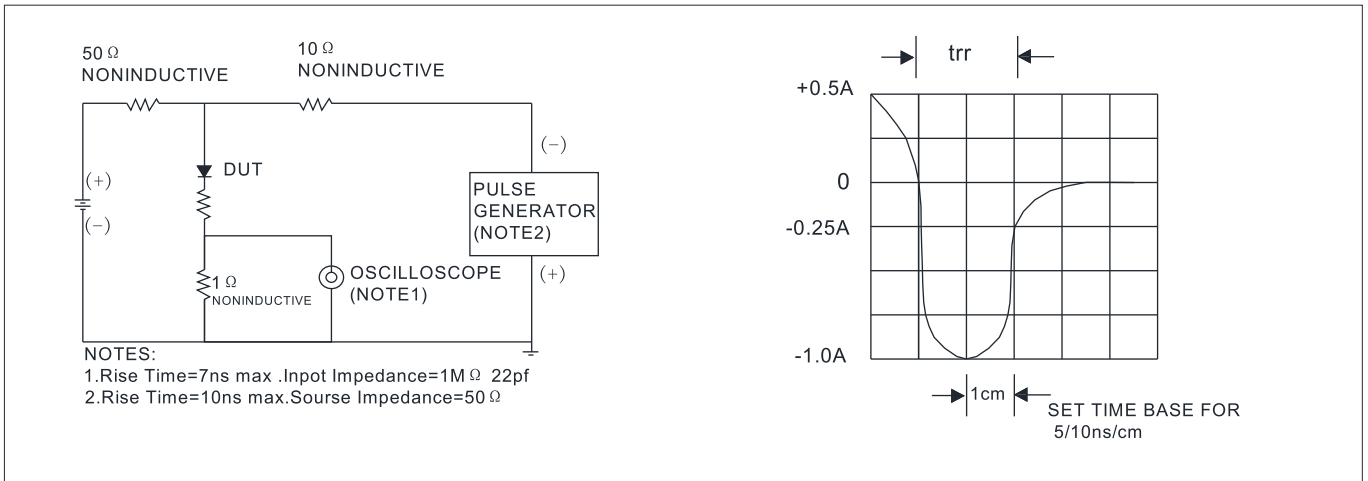

■ **OUTLINE DIMENSIONS**

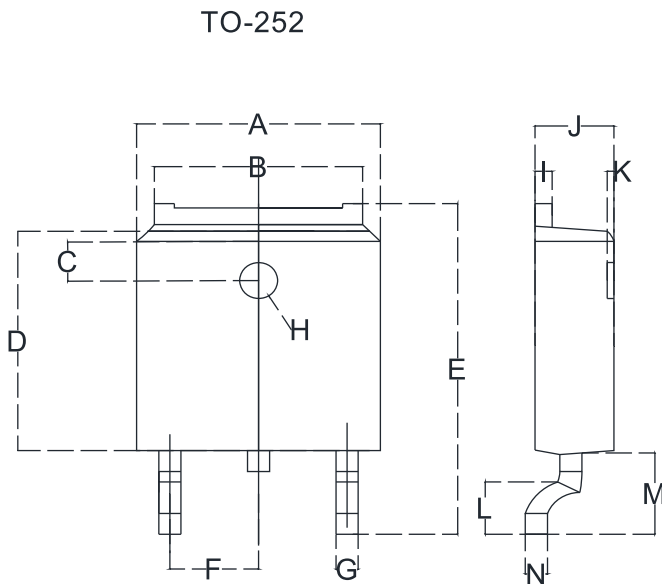

TO-252		
Dim	Min	Max
A	6.500	6.700
B	5.100	5.460
C	1.400	1.800
D	6.000	6.200
E	10.000	10.400
F	2.166	2.366
G	0.660	0.860
H	Φ 1.050	Φ 1.350
I	0.460	0.580
J	2.200	2.400
K	0	0.300
L	0.890	2.290
M	2.730	3.080
N	0.430	0.580