

■ **FEATURES**

- Guardring for overvoltage protection
- Low forward voltage drop, Low power losses
- High forward surge capability
- High frequency operation
- Solder dip 275 °C max. 7 s, per JESD 22-B106

■ **TYPICAL APPLICATIONS**

For use in low voltage high frequency inverters, freewheeling, DC/DC converters, and polarity protection applications.

■ **MECHANICAL DATA**

- **Package:** DO-201AD(DO-27)
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Color band denotes the cathode end

■ **MAXIMUM RATINGS** ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SR340L	SR360L	SR3100L
Device marking code			SR340L	SR360L	SR3100L
Repetitive Peak Reverse Voltage	VRRM	V	40	60	100
Average Rectified Output Current @60Hz sine wave, Resistance load, T_a (FIG. 1)	I_O	A	3.0		
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, $T_a=25$	IFSM	A	55		
Storage Temperature	Tstg		-55 ~+150		
Junction Temperature	T_j		-55 ~+125	-55 ~+150	

■ **ELECTRICAL CHARACTERISTICS** ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	SR340L	SR360L	SR3100L
Maximum instantaneous forward voltage drop per diode	V _F	V	IFM=3.0A	0.44	0.5	0.74
Maximum DC reverse current at rated DC blocking voltage per diode	I_R	mA	$T_a=25^{\circ}\text{C}$	0.2		
			$T_a=100^{\circ}\text{C}$	50		
Typical junction capacitance ⁽¹⁾	C _j	pF		220	420	130

Note (1) Typical junction capacitance measured at 1MHz and applied reverse voltage of 4.0 V.D.C.

■ **THERMAL CHARACTERISTICS** ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SR340L	SR360L	SR3100L
Thermal Resistance Junction to ambient	R θ J-A	$^{\circ}\text{C/W}$	20		

■ **PACKAGING INFORMATION**

PREFERED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SR340L~SR3100L	D1	Approximate 1.05	1250	1250	12500	Tape
SR340L~SR3100L	C1	Approximate 1.05	250	250	12500	Bulk

■ **CHARACTERISTICS (TYPICAL)**

FIG.1: I_o-T_a Curve

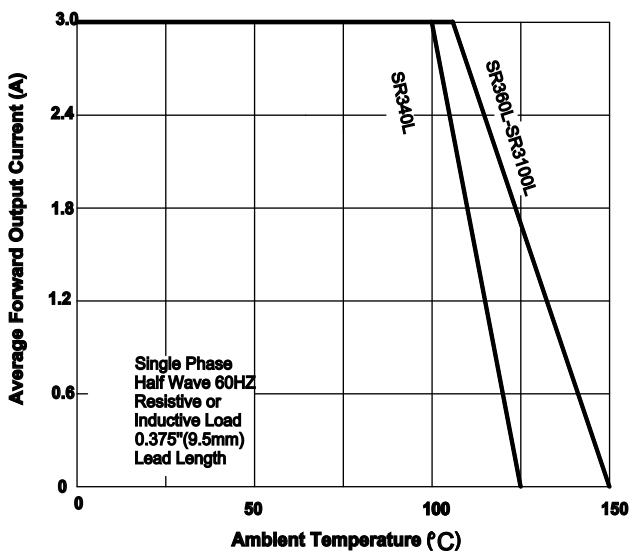


FIG.2: Forward Surge Current Capability

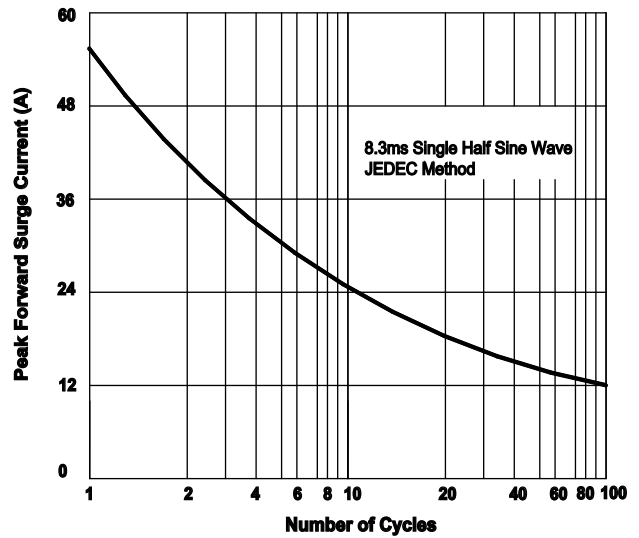


FIG.3: Forward Voltage



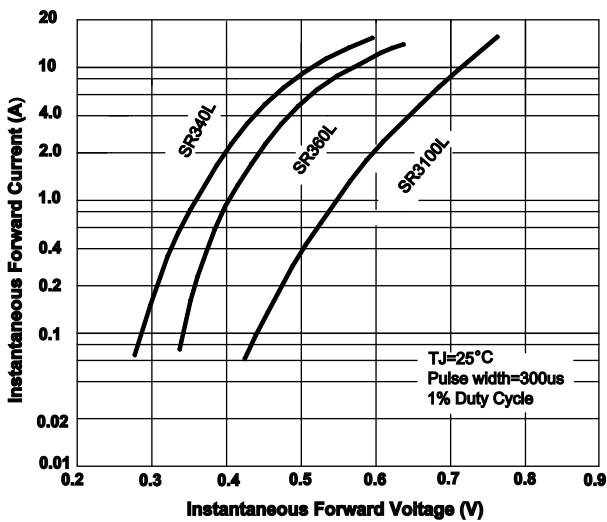


FIG.4: Typical Reverse Characteristics

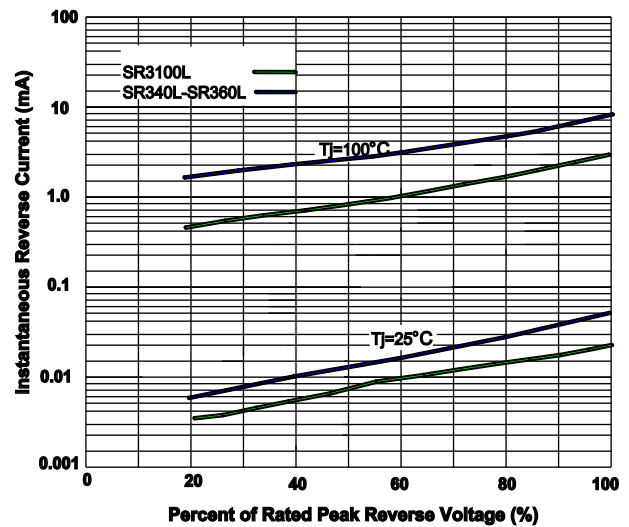

■ **OUTLINE DIMENSIONS**

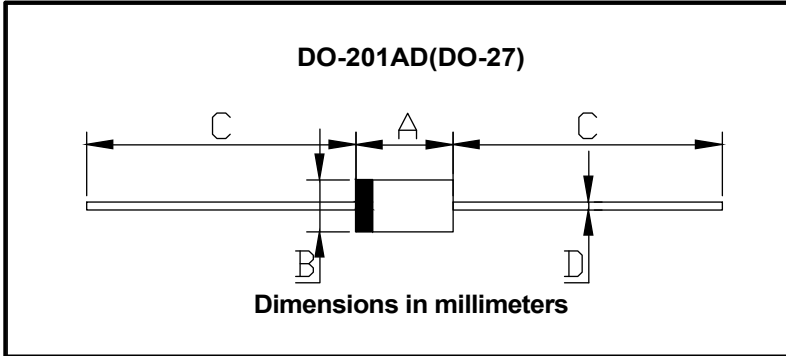

DO-201AD(DO-27)		
Dim	Min	Max
A	8.50	9.50
B	5.00	5.60
C	25.4	/
D	1.2	1.3