

■ **FEATURES**

- High frequency operation
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

■ **TYPICAL APPLICATIONS**

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

■ **MECHANICAL DATA**

- **Package:** TO-220AB  
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

■ **MAXIMUM RATINGS** (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MBRU20100CTA
Device marking code			MBRU20100CTA
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	V	100
Average Rectified Output Current @60Hz sine wave, R-load, Ta (FIG 1)	I <sub>o</sub>	A	20
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, Ta=25°C	I <sub>FSM</sub>	A	250
Current Squared Time @1ms≤t<8.3ms Tj=25°C	I <sup>2</sup> t	A <sup>2</sup> s	262
Storage Temperature	T <sub>stg</sub>	°C	-55 ~ +150
Junction Temperature	T <sub>j</sub>	°C	-55 ~ +150

■ **ELECTRICAL CHARACTERISTICS** (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	MBRU20100CTA
Maximum instantaneous forward voltage drop per diode	V <sub>FM</sub>	V	I <sub>FM</sub> =10.0A	0.65
Maximum DC reverse current at rated DC blocking voltage per diode	I <sub>RRM1</sub>	mA	V <sub>RM</sub> =V <sub>RRM</sub> Ta=25°C	0.2
	I <sub>RRM2</sub>		V <sub>RM</sub> =V <sub>RRM</sub> Ta=100°C	50

■ **THERMAL CHARACTERISTICS** (Ta=25°C Unless otherwise specified)


PARAMETER	SYMBOL	UNIT	MBRU20100CTA
Thermal Resistance Between junction and case	R <sub>θJ-C</sub>	°C/W	2.0

■ **PACKAGING INFORMATION**


PREFERRED P/N	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MBRU20100CTA	Approximate 1.9	50	1000	5000	Tube

■ **CHARACTERISTICS (TYPICAL)**


**FIG1: I<sub>o</sub> -T<sub>c</sub> Curve**

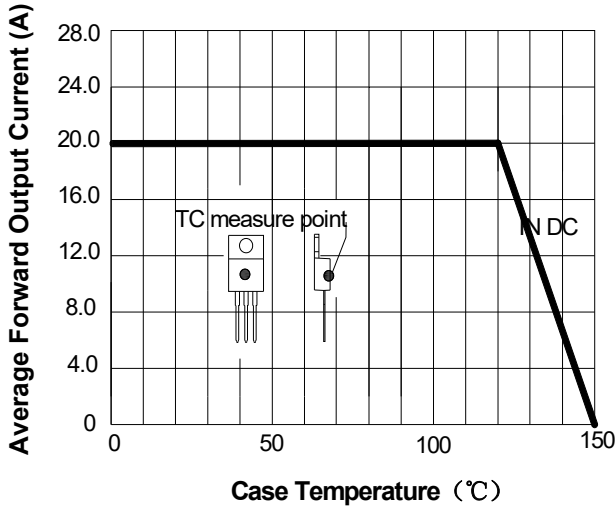


**FIG2: Surge Forward Current Capability**

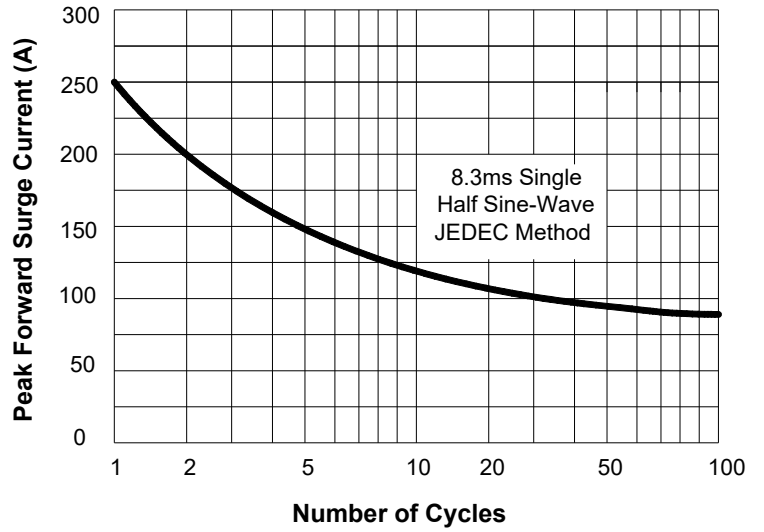


**FIG3: Forward Voltage**

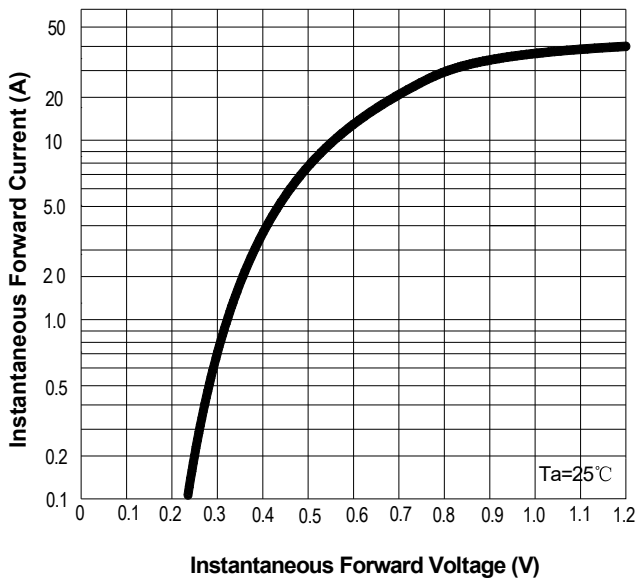

**FIG4: Typical Reverse Characteristics**

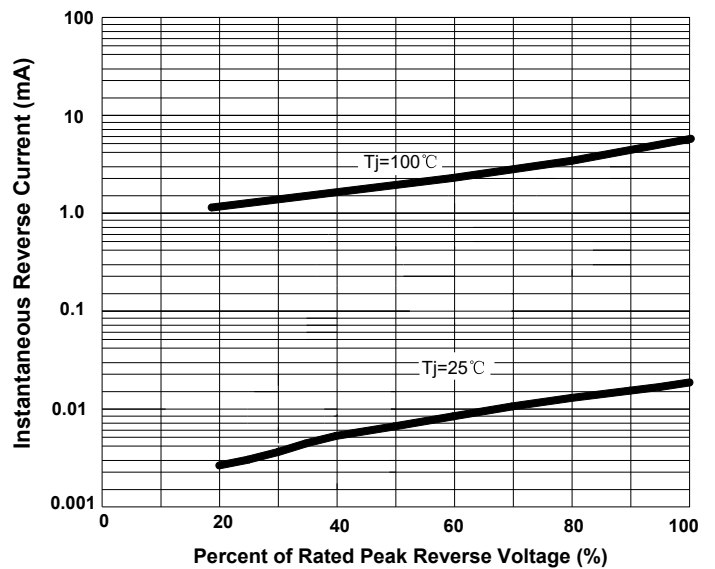

■ **OUTLINE DIMENSIONS**

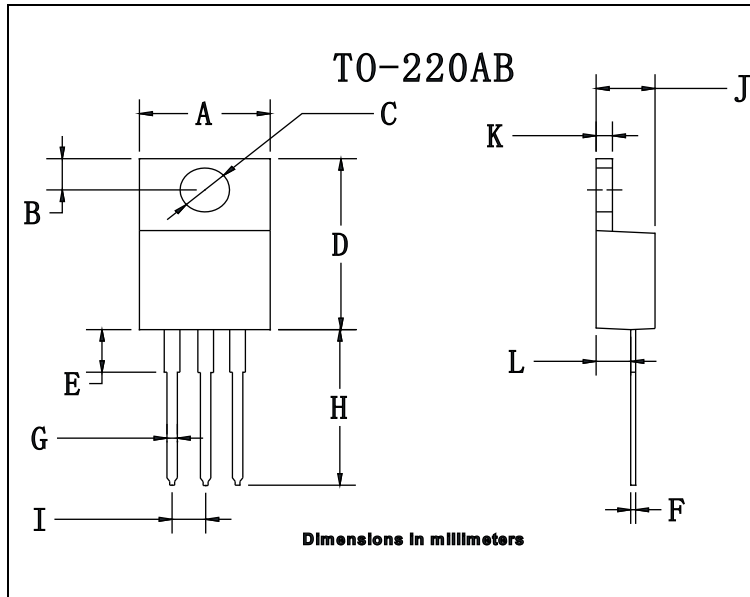

<b>TO-220AB</b>		
Dim	Min	Max
A	9.5	10.9
B	2.22	3.27
C	3.34	4.31
D	14.5	15.5
E	3.16	4.46
F	0.28	0.64
G	0.68	0.94
H	13.06	14.62
I	2.01	3.07
J	4.04	5.1
K	1.14	1.4
L	2.14	3.19