

■ **FEATURES**

- High frequency operation
- High surge forward current capability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

■ **TYPICAL APPLICATIONS**

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

■ **MECHANICAL DATA**

- **Package:** TO-220AC
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

■ **MAXIMUM RATINGS** (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MUR1020	MUR1040	MUR1060
Device marking code			MUR1020	MUR1040	MUR1060
Repetitive Peak Reverse Voltage	VRRM	V	200	400	600
Average Rectified Output Current @60Hz half sine-wave, R-load, T _c (FIG.1)	I _o	A	10		
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, T _a =25°C	IFSM	A	125		
Current Squared Time @1ms≤t≤8.3ms T _j =25°C	I ² t	A ² s	65		
Storage Temperature	T _{stg}	°C	-55 ~ +150		
Junction Temperature	T _j	°C	-55 ~ +150		

■ **ELECTRICAL CHARACTERISTICS** (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	MUR1020	MUR1040	MUR1060
Maximum instantaneous forward voltage drop per diode	V _{FM}	V	I _{FM} =10.0A	0.975	1.25	1.5
Maximum DC reverse current at rated DC blocking voltage per diode	I _{RRM1}	μA	V _{RM} =V _{RRM} T _a =25°C	10		
	I _{RRM2}		V _{RM} =V _{RRM} T _a =125°C	500		
Reverse Recovery Time	T _{rr}	ns	I _F =0.5A I _{RM} =1A I _{RR} =0.25A	50		

■ **THERMAL CHARACTERISTICS** (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MUR1020	MUR1040	MUR1060
Thermal Resistance Between junction and case	R _{θj-c}	°C/W	2.0		

■ **PACKAGING INFORMATION**

PREFERRED P/N	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MUR1020 MUR1040 MUR1060	Approximate 1.86	50	1000	5000	Tube

■ **CHARACTERISTICS (Typical)**

FIG1: I_o -Tc Curve

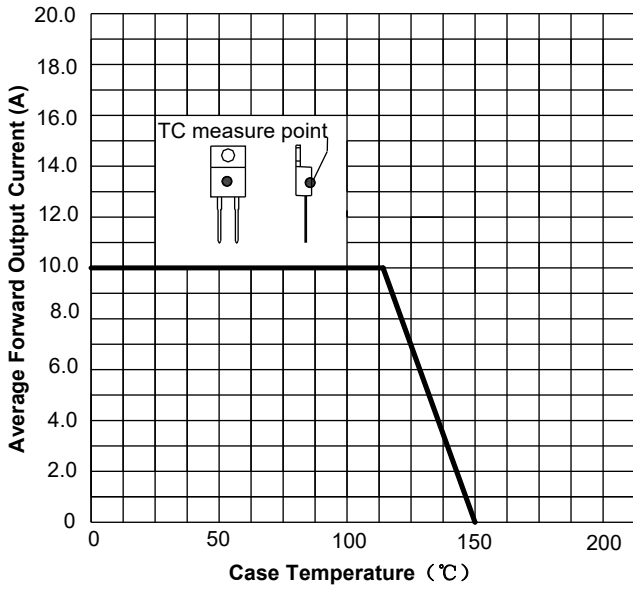


FIG2: Surge Forward Current Capability

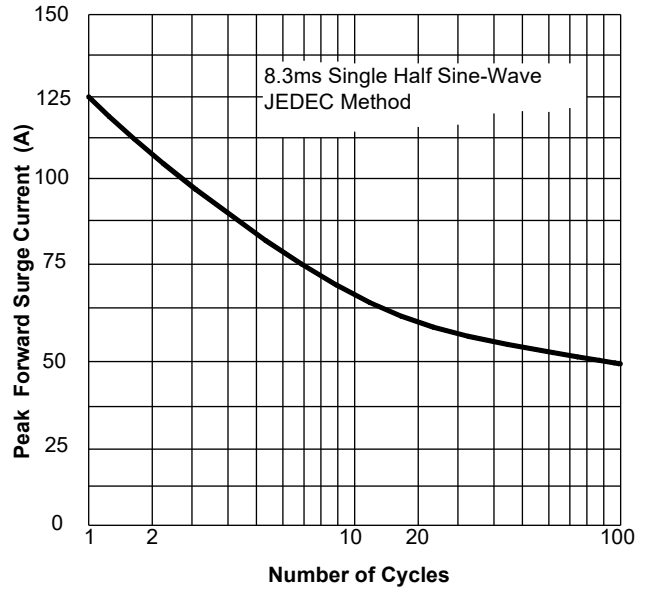


FIG3: Forward Voltage

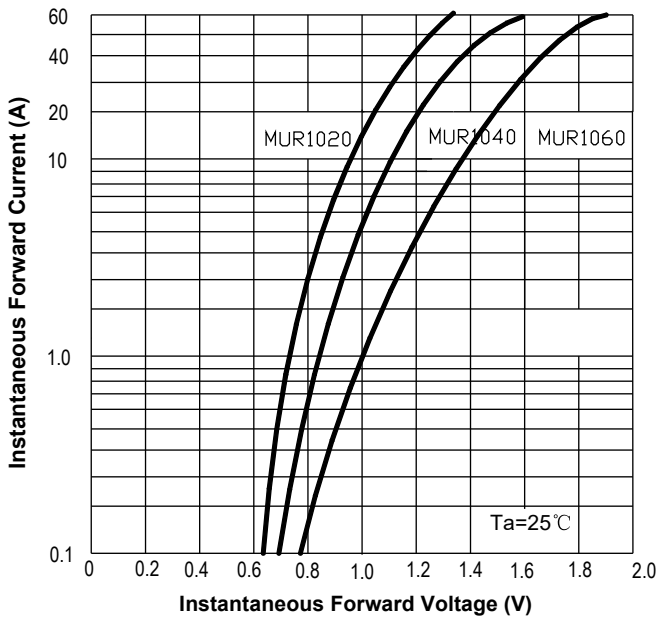


FIG4: Typical Reverse Characteristics




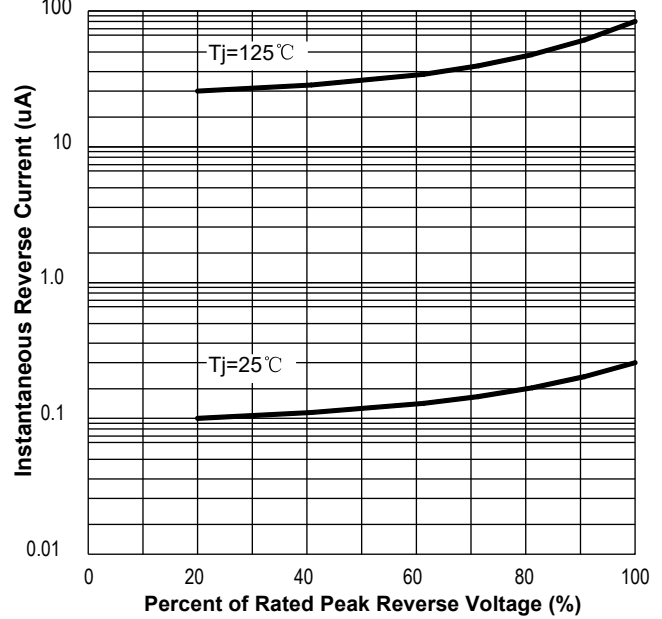


FIG.5 Diagram of circuit and Testing wave form of reverse recovery time

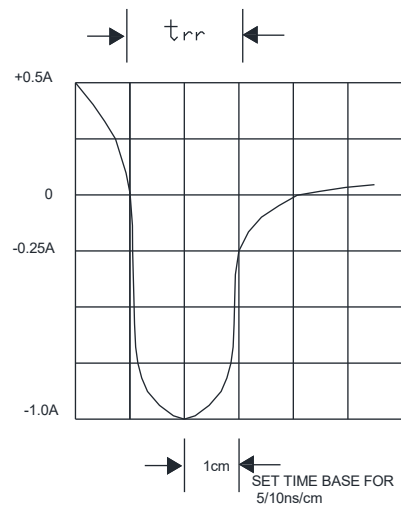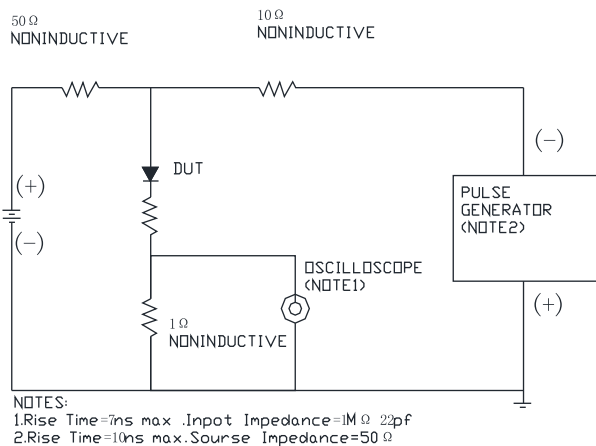

■ **OUTLINE DIMENSIONS**

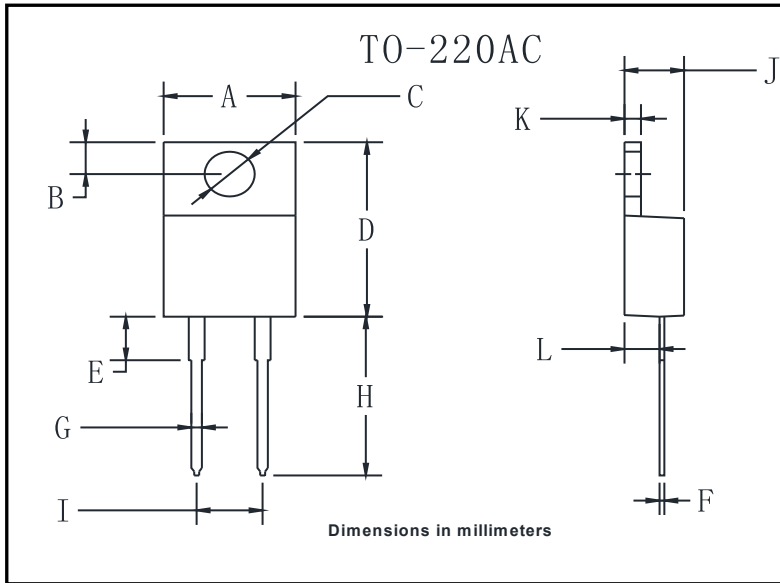

TO-220AC		
Dim	Min	Max
A	9.5	10.9
B	2.22	3.27
C	3.34	4.31
D	14.5	15.5
E	3.16	4.46
F	0.28	0.64
G	0.68	0.94
H	13.06	14.62
I	4.55	5.60
J	4.04	5.1
K	1.14	1.4
L	2.14	3.19