

■ **FEATURES**

- Guardring for overvoltage protection
- Low power loss
- Extremely fast switching
- High forward surge capability
- High frequency operation
- Solder dip 275 °C max. 7 s, per JESD 22-B106

■ **TYPICAL APPLICATIONS**

For use in low voltage high frequency inverters, freewheeling, DC/DC converters, and polarity protection applications.

■ **MECHANICAL DATA**

- **Package:** DO-204AL(DO-41)
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Color band denotes the cathode end

■ **MAXIMUM RATINGS** ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	1N5817	1N5818	1N5819
Device marking code			1N5817	1N5818	1N5819
Repetitive Peak Reverse Voltage	V_{RRM}	V	20	30	40
Average Rectified Output Current @60Hz sine wave, Resistance load, T_a (FIG.1)	I_o	A	1.0		
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, $T_a=25$	I_{FSM}	A	30		
Storage Temperature	T_{stg}		-55 ~+150		
Junction Temperature	T_j		-55 ~+125		

■ **ELECTRICAL CHARACTERISTICS** ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	1N5817	1N5818	1N5819
Maximum instantaneous forward voltage drop per diode	V_F	V	$I_{FM}=1.0A$	0.45	0.55	0.6
Maximum DC reverse current at rated DC blocking voltage per diode	I_R	mA	$T_a=25$	0.2		
			$T_a=100$	20		
Typical junction capacitance	C_j	pF	Measured at 1MHZ and Applied Reverse Voltage of 4.0 V.D.C.	60	50	

■ **THERMAL CHARACTERISTICS** ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	1N5817	1N5818	1N5819
Thermal Resistance	$R_{\theta J-A}$	$^{\circ}\text{W}$	50		

■ **PACKAGING INFORMATION**

PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
1N5817~1N5819	D1	Approximate 0.27	Approximate 5000	5000	50000	Tape
1N5817~1N5819	C1	Approximate 0.27	Approximate 1000	1000	50000	Bulk

■ **CHARACTERISTICS (TYPICAL)**

FIG.1: I_o - T_a Curve

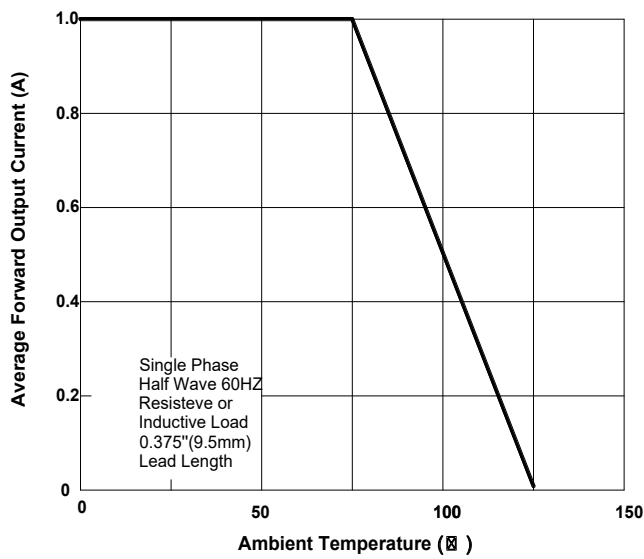


FIG.2: Forward Surge Current Capability

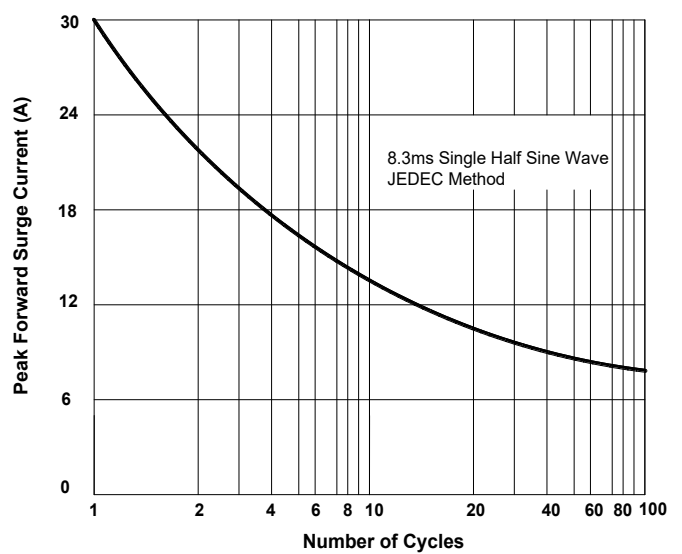


FIG.3: Forward Voltage



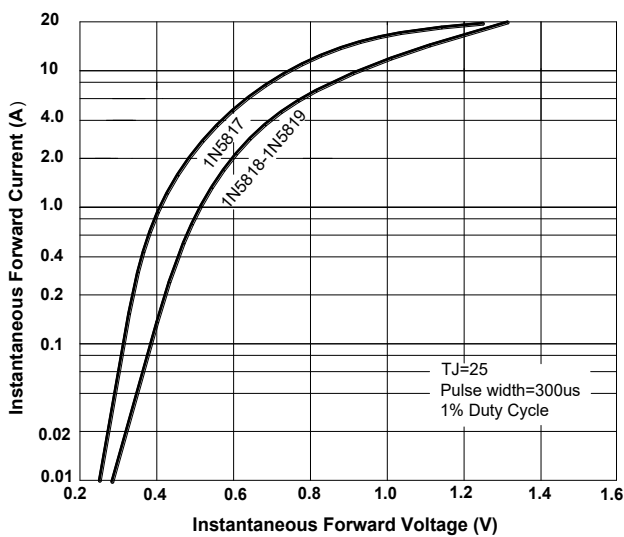


FIG.4: Typical Reverse Characteristics

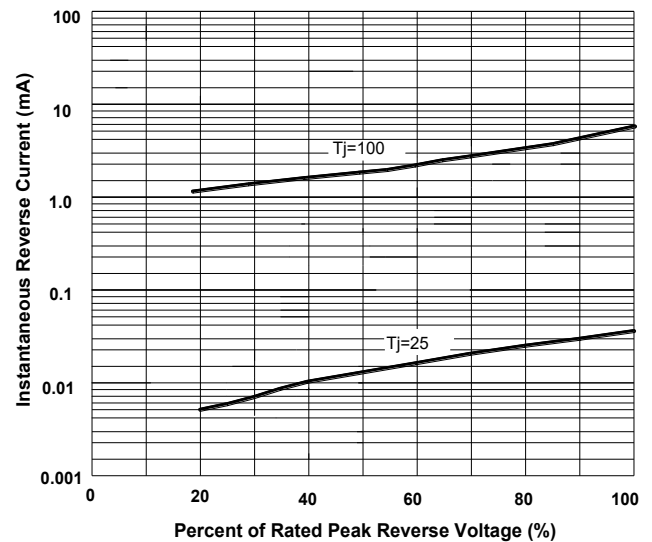

■ **OUTLINE DIMENSIONS**

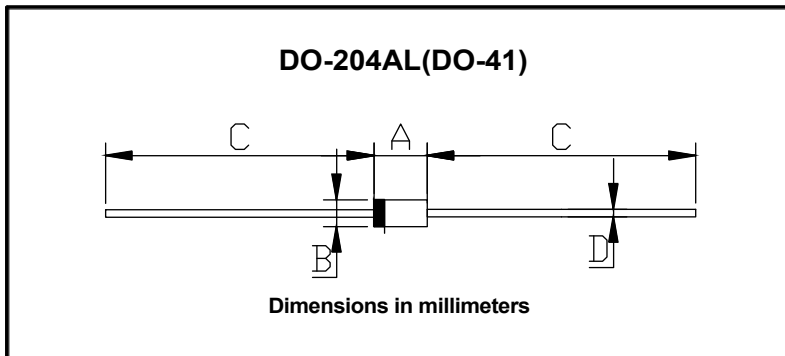

DO-204AL(DO-41)		
Dim	Min	Max
A	4.22	5.21
B	2.03	2.72
C	25.4	/
D	0.69	0.86