

■ **FEATURES**

- UL recognition, file #E230084
- Glass passivated chip junction
- Ideal for printed circuit boards
- High surge current capability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

■ **TYPICAL APPLICATIONS**

General purpose use in AC/DC bridge full wave rectification for monitor, TV, printer, power supply, switching mode power supply, adapter, audio equipment, and home appliances applications.

■ **MECHANICAL DATA**

- **Package:** GBU  
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■ **MAXIMUM RATINGS** ( $T_a=25^{\circ}\text{C}$  Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	GBU25005	GBU2501	GBU2502	GBU2504	GBU2506	GBU2508	GBU2510
Device marking code			GBU25005	GBU2501	GBU2502	GBU2504	GBU2506	GBU2508	GBU2510
Maximum Repetitive Peak Reverse Voltage	VRRM	V	50	100	200	400	600	800	1000
Maximum RMS Voltage	VRMS	V	35	70	140	280	420	560	700
Maximum DC blocking Voltage	VDC	V	50	100	200	400	600	800	1000
Average rectified output current @60Hz sine wave, R-load	With heatsink $T_c=100^{\circ}\text{C}$	IO	A	25.0					
	Without heatsink $T_a=25^{\circ}\text{C}$			3.5					
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, $T_j=25^{\circ}\text{C}$	IFSM	A	300						
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, $T_j=25^{\circ}\text{C}$			600						
Current squared time @1ms $\leq t \leq$ 8.3ms $T_j=25^{\circ}\text{C}$ , Rating of per diode	I <sup>2</sup> t	A <sup>2</sup> S	374						
Storage temperature	T <sub>stg</sub>	°C	-55 ~ +150						
Junction temperature	T <sub>j</sub>	°C	-55 ~ +150						
Dielectric strength @ Terminals to case, AC 1 minute	V <sub>dis</sub>	KV	2.5						
Mounting torque @Recommend torque: 5kg·cm	Tor	kg·cm	8						

■ **ELECTRICAL CHARACTERISTICS** ( $T_a=25^{\circ}\text{C}$  Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	GBU25005	GBU2501	GBU2502	GBU2504	GBU2506	GBU2508	GBU2510
Maximum instantaneous forward voltage drop per diode	$V_F$	V	$I_{FM}=12.5\text{A}$							1.0
Maximum DC reverse current at rated DC blocking voltage per diode	$I_R$	$\mu\text{A}$	$T_j=25^{\circ}\text{C}$							5
			$T_j=125^{\circ}\text{C}$							
Typical junction capacitance	$C_j$	$\text{pF}$	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C							98

■ **THERMAL CHARACTERISTICS** ( $T_a=25^{\circ}\text{C}$  Unless otherwise specified)



PARAMETER		SYMBOL	UNIT	GBU25005	GBU2501	GBU2502	GBU2504	GBU2506	GBU2508	GBU2510
Thermal Resistance	Between junction and ambient, Without heatsink	$R_{\theta J-A}$	$^{\circ}\text{C/W}$							25.0
	Between junction and case, With heatsink	$R_{\theta J-C}$								



Note: Device mounted on 75mm x 45mm x 5.5mm Aluminum Plate Heatsink.

■ **PACKAGING INFORMATION**


PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
GBU25005 THRU GBU2510	B1	Approximate 3.97	20	1000	2000	TUBE

■ **CHARACTERISTICS (TYPICAL)**

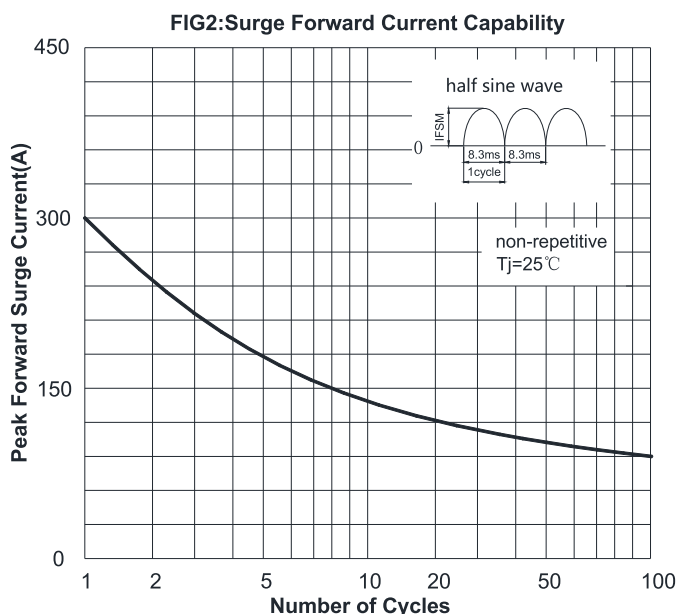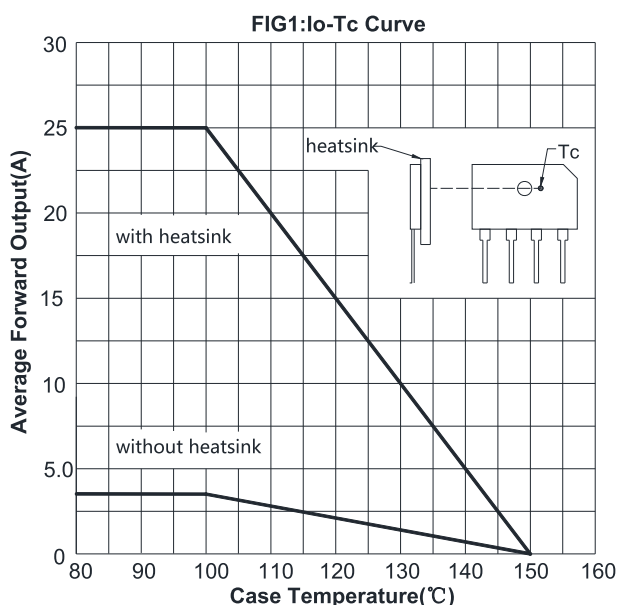

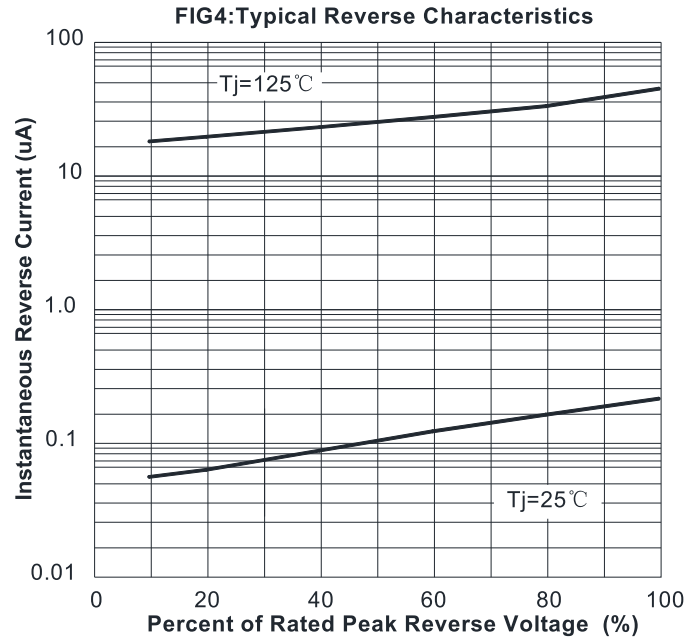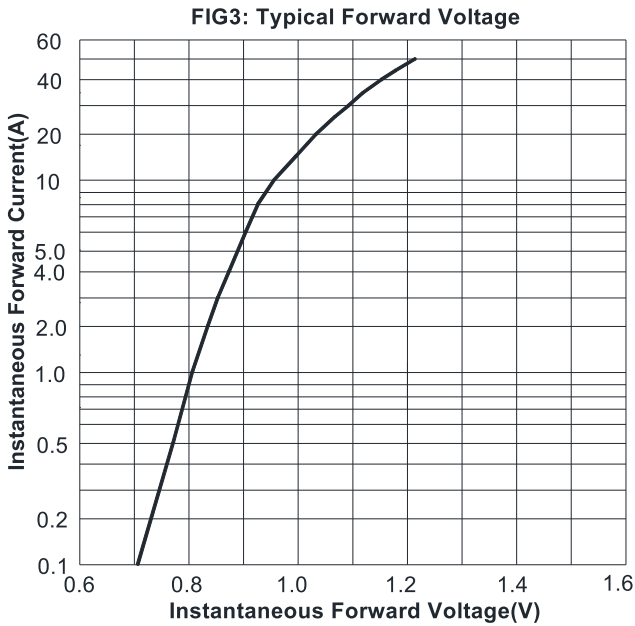

■ **OUTLINE DIMENSIONS**

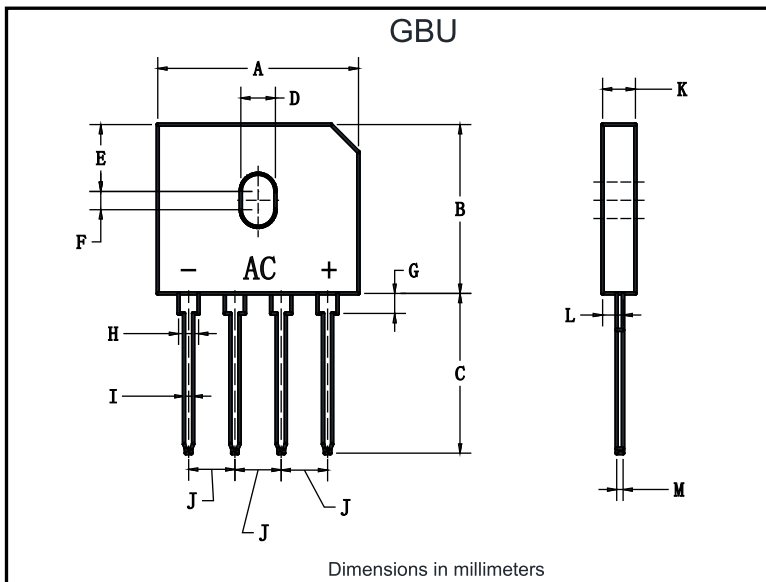

<b>GBU</b>		
Dim	Min	Max
A	21.80	22.30
B	18.30	18.80
C	17.50	18.00
D	3.50	4.10
E	7.40	7.90
F	1.65	2.16
G	1.91	2.54
H	2.06	2.54
I	1.02	1.27
J	4.83	5.33
K	3.30	3.56
L	2.40	2.66
M	0.46	0.56