

■ **FEATURES**

- UL recognition, file #E230084
- I Thin single in-line package
- High surge current capability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

■ **TYPICAL APPLICATIONS**

General purpose use in AC/DC bridge full wave rectification for switching power supply, home appliances, office equipment, industrial automation applications.

■ **MECHANICAL DATA**

- **Package:** TSB-5
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■ **MAXIMUM RATINGS** ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	DF25NA80	DF25NA100	DF25NA160
Device marking code			DF25NA80	DF25NA100	DF25NA160
Repetitive Peak Reverse Voltage	VRRM	V	800	1000	1600
Average Rectified Output Current @60Hz sine wave, R-load, With heatsink $T_c=87^{\circ}\text{C}$	IO	A	25		
Surge(Non-repetitive)Forward Current @60HZ half-sine wave, 1 cycle, $T_j=25^{\circ}\text{C}$	IFSM	A	400		
Current Squared Time @1ms≤t<8.3ms $T_j=25^{\circ}\text{C}$, Rating of per diode	i^2t	A ² S	666		
Storage Temperature	Tstg	°C	-55 ~+150		
Junction Temperature	Tj	°C	-55 ~+150		

■ **ELECTRICAL CHARACTERISTICS** ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	DF25NA80	DF25NA100	DF25NA160
Maximum instantaneous forward voltage drop per diode	V _F	V	IFM=12.5A	1.1		
Maximum DC reverse current at rated DC blocking voltage per diode	I _{RRM}	μA	V _{RM} =V _{RRM}	10		





■ **THERMAL CHARACTERISTICS** ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	DF25NA80	DF25NA100	DF25NA160
Thermal Resistance Between junction and case, With heatsink	R _{θJ-C}	°C/W	1.2		


■ **PACKAGING INFORMATION**

PREFERRED P/N	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
DF25NA80~DF25NA160	Approximate 15.8	96	96	576	Paper Box

■ **CHARACTERISTICS (TYPICAL)**

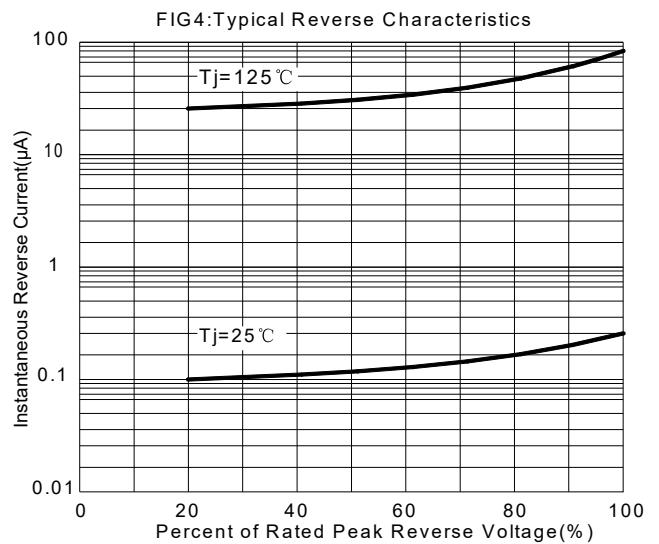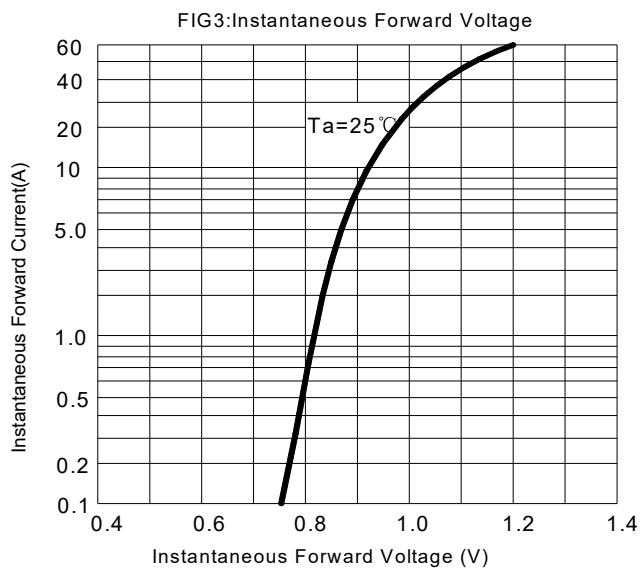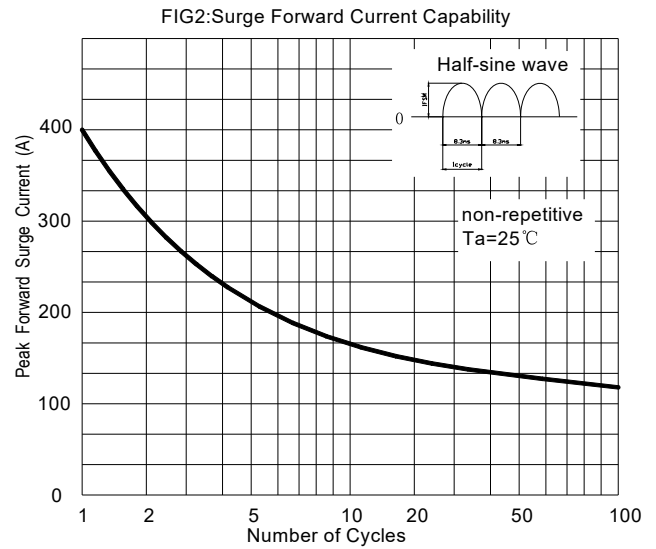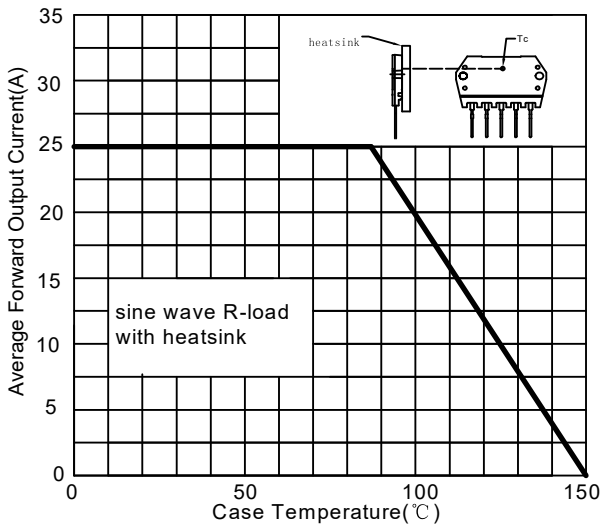

■ **OUTLINE DIMENSIONS**

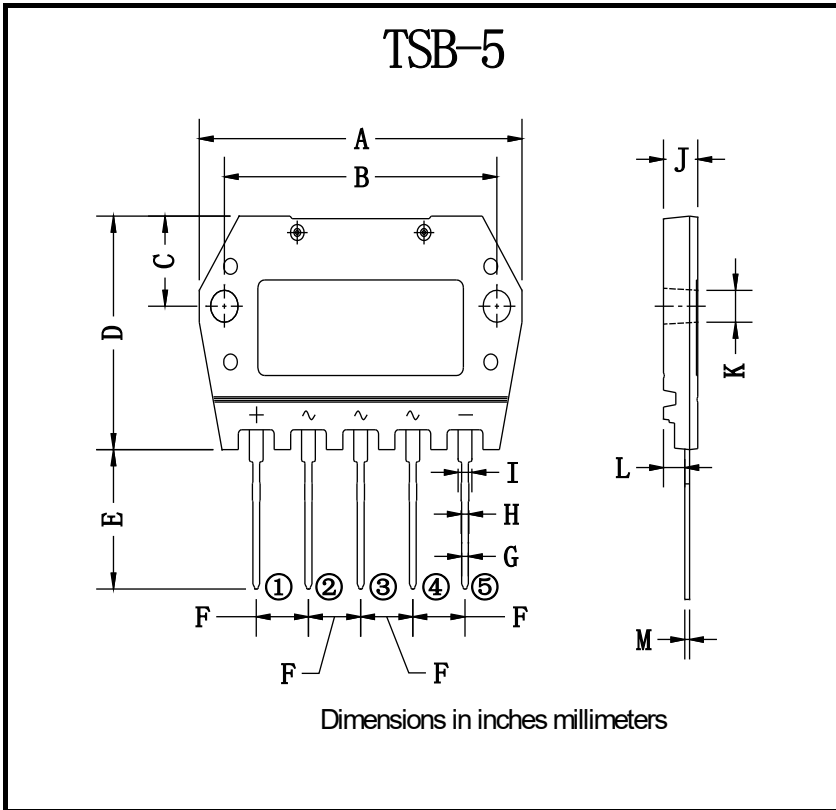

TSB-5		
Dim	Min	Max
A	46.6	47.6
B	39.5	40.1
C	11.0	11.6
D	28.8	29.8
E	17.2	17.8
F	7.52	7.72
G	0.90	1.10
H	1.00	1.20
I	1.90	2.10
J	4.70	5.30
K	4.00	4.50
L	3.00	3.20
M	0.60	0.80