

■ FEATURES

- V_R 100V
- I_{FAV} 250mA

■ TYPICAL APPLICATIONS

- Extreme fast switches

■ MECHANICAL DATA

- **Package:** SOD323
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end
- **Marking:** A6

■ MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Conditions	VALUE
Repetitive peak reverse voltage	V_{RRM}	V		100
Peak forward surge current	I_{FSM}	A	$t_p=300\mu\text{s}$	2
Average forward current	I_{FAV}	mA		250
Power dissipation	P_{tot}	mW		200
Thermal Resistance	R_{thJA}	K/W		625
Maximum junction temperature	T_j	$^\circ\text{C}$		-55 to +150
Storage temperature range	T_{stg}	$^\circ\text{C}$		-55 to +150





■ ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Conditions	Min	Max
Maximum Forward voltage	V_F	V	$I_F=1\text{mA}$		0.715
			$I_F=10\text{mA}$		0.855
			$I_F=50\text{mA}$		1.00
			$I_F=150\text{mA}$		1.25
Maximum Reverse current	I_R	nA	$V_R=20\text{V}$		25
	I_R	μA	$V_R=75\text{V}$		1.0
Minimum Breakdown voltage	V_R	V	$I_R=100\mu\text{A}$	100	
Maximum Diode capacitance	C_D	pF	$V_R=V_F=0\text{V}, f=1\text{MHz}$		4
Maximum Reverse recovery time	t_{rr}	ns	$I_F=10\text{mA}, V_R=6\text{V}, I_{rr}=1\text{mA}, R_L=100\Omega$		4


PACKAGING INFORMATION

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BAS316	F2	Approximate 0.004	3000	30000	120000	7" reel

CHARACTERISTICS (TYPICAL)

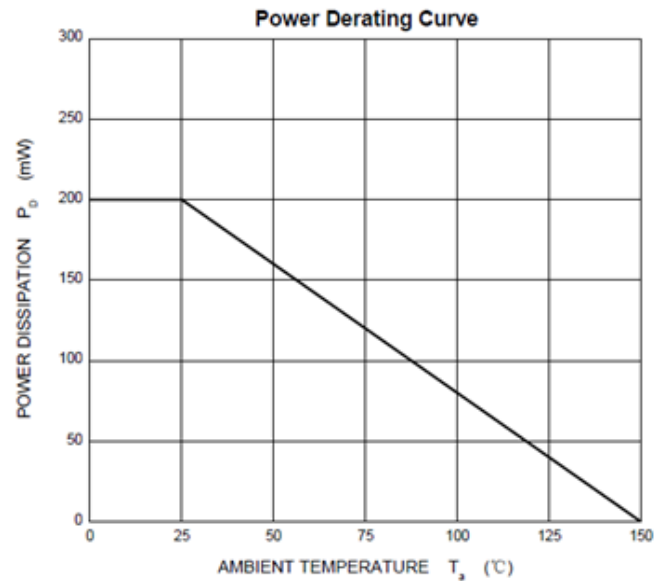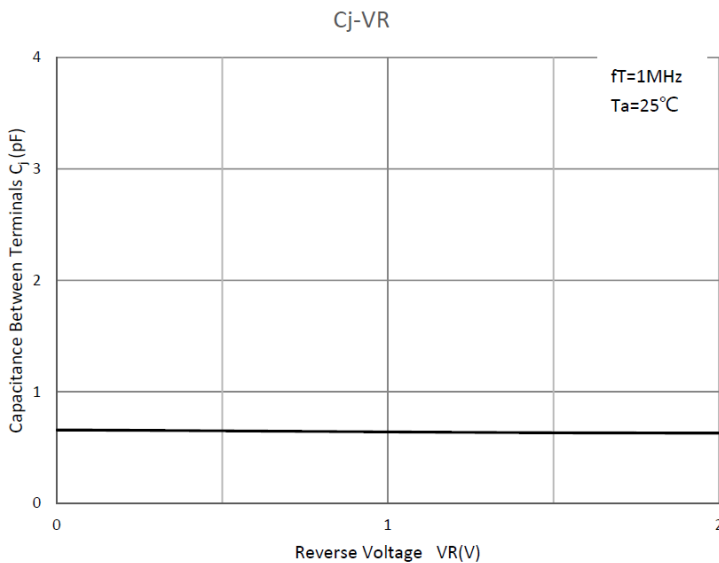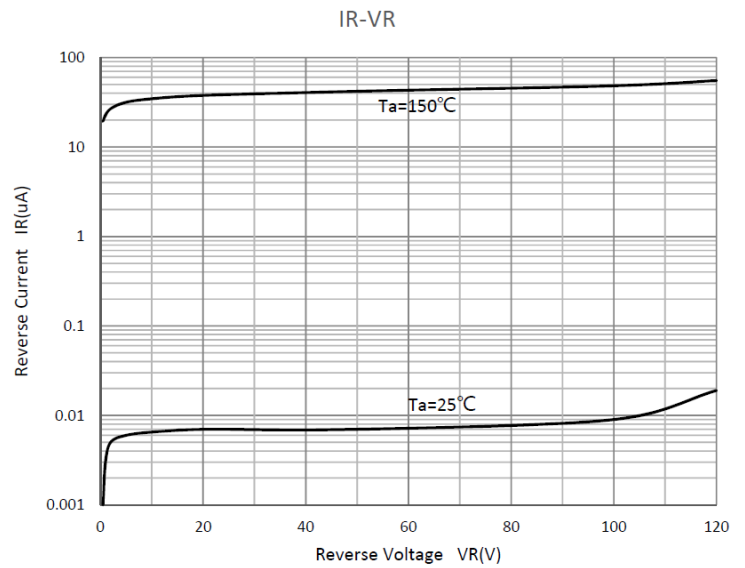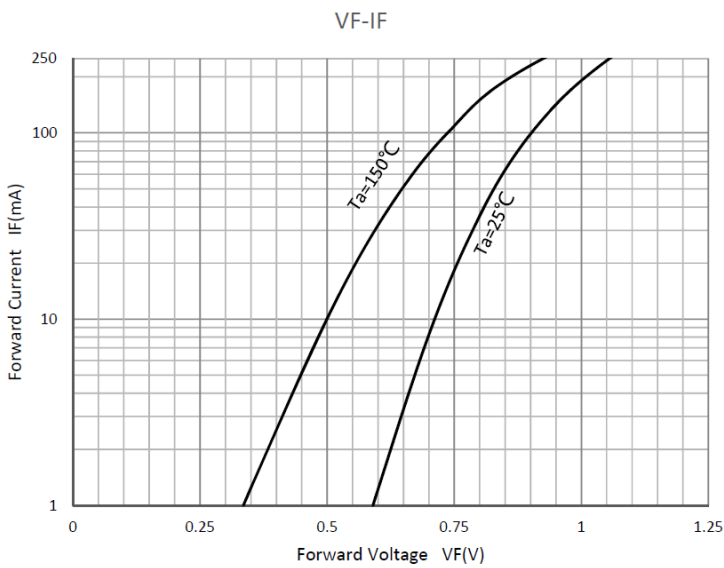

■ **SOD-323 PACKAGE OUTLINE DIMENSIONS**

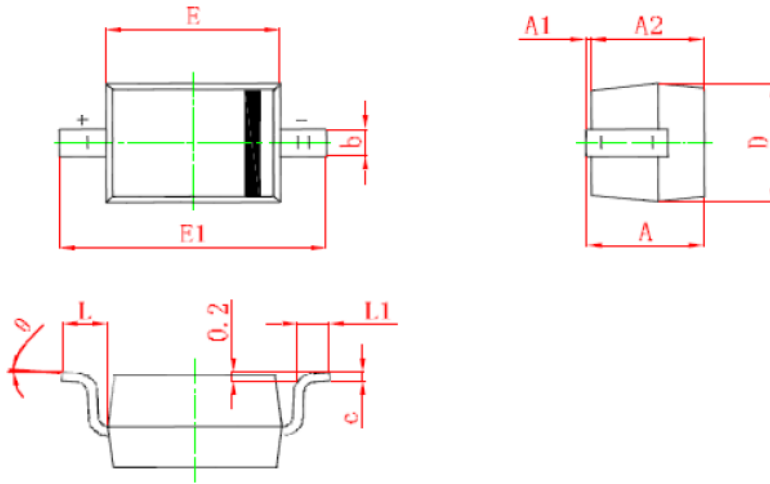

Symbol	Min. (mm)	Max. (mm)
A		1.000
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.400
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
L	0.475REF	
L1	0.250	0.400
θ	0°	8°

■ **SOD-323 SOLDERING FOOTPRINT**

