

■ INTRODUCTION

MES Series are constructed with metallized polyester film dielectric, copperplated lead and epoxy resin powder coating. They are suitable for blocking, coupling, decoupling, filtering, bypass timing circuit and ideal for use in telecommunication equipment, data processing, equipment, industrial instruments, automatic control systems, and other general electronic equipment.

■ FEATURES

- High moisture resistance
- Good solderability
- Non-inductive construction
- Self-healing property
- Miniature size
- Standard 5mm lead spacing
- Wide rated voltage range
- Wide rated capacitance range
- Available for wire automatic insertion range

■ CONSTRUCTION


- Dielectric: Metallized Polyester Film
- Winding: Non-inductive type
- Lead Wire: Tinned Wire (Cu wire) or Tinned Copper Clad Wire, Lead Free Solder
- Inner Coating: epoxy resin
- Outer Coating: Flame retarding epoxy resin (UL-94V-0)
- Conditional Standard Test: Temperature of from 15°C to 35°C. RH45 to 75%.

■ SPECIFICATIONS

Item	Performance
Operating Temp. Range	-40°C ~ 125°C (VR Derates 1.25% per °C over 105°C)
Capacitance Range	0.001μF ~ 1.2μF
Capacitance Tolerance	± 5%(J), 10%(K), +20%(M)
Rated Voltage VR 85°C	50/63Vdc, 100Vdc, 250Vdc, 400Vdc, 630Vdc
Dissipation Factor	1.0%(0.01)max @ 1KHz, 25°C
Insulation Resistance	$V_R \leq 100V_{DC} \geq 15000M\Omega$ ($C \leq 0.33\mu F$) $\geq 5000M\Omega \times \mu F$ ($C > 0.33\mu F$) $V_R \leq 100V_{DC} \geq 30000M\Omega$ ($C \leq 0.33\mu F$) $\geq 10000M\Omega \times \mu F$ ($C > 0.33\mu F$)

■ PERFORMANCE

Item	Metalized Polyester
Capacitance Drift	Cycled through the operating temperature range 2%.
Humidity Test	Will withstand the test of R.H. 95% at 40°C for 1000hrs. $C \leq 5\%$ DF < 1.2% IR > 10000MΩ
Load Test	Will withstand a testing voltage at 140% of W.V. for 1000hrs at 85°C. $C \leq 5\%$ DF < 1.2% IR > 5000MΩ
Lead Pull Test	Will withstand a pull of 1.5Kg applied axially for 10 seconds.
Lead Bend Test	Will sustain two cycles without breaking when attaching a load of 0.5Kg to the end of the lead and then rotating the capacitor 90° from the direction of lead egress. Then 180 in opposite direction, then back to the starting point.
Solderability	Immersed in molten solder (230 ± 0.5 sec.) after testing, the wound lead and gap in the wound lead will be covered and filled by solder. Will be difficult to unwind by finger.
Dielectric Strength	Shall withstand 200% or 160% of rated voltage at 25°C for 1 minute with current limiting resistance of 1 Ω / V.

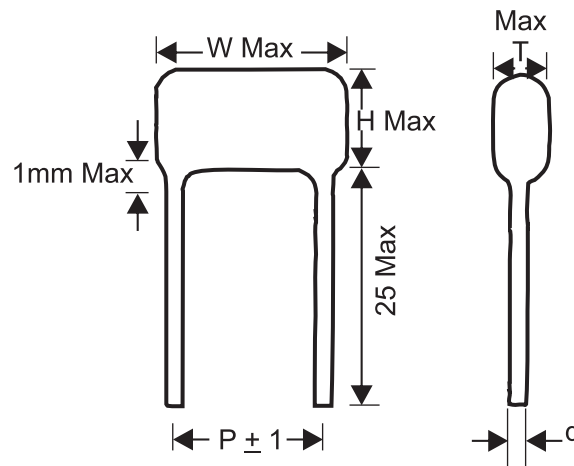

■ MAXIMUM DIMENSIONS (mm)

W. V. (μ F)	code	50 / 63VDC (1H/1J)						100VDC (2A)						250VDC (2E)						400VDC (2G)						630VDC (2J)					
		W	H	T	P	d	V/ μ s	W	H	T	P	d	V/ μ s	W	H	T	P	d	V/ μ s	W	H	T	P	d	V/ μ s	W	H	T	P	d	V/ μ s
0.001	102	6.5	6.5	3.5	5	0.5	10	6.5	6.5	3.5	5	0.5	15	6.5	6.5	3.5	5	0.5	50	6.5	6.5	3.5	5	0.5	50	6.5	6.5	3.5	5	0.5	50
0.0012	122	6.5	6.5	3.5	5	0.5	10	6.5	6.5	3.5	5	0.5	15	6.5	6.5	3.5	5	0.5	50	6.5	6.5	3.5	5	0.5	50	6.5	6.5	3.5	5	0.5	50
0.0033	332	6.5	6.5	3.5	5	0.5	10	6.5	6.5	3.5	5	0.5	15	6.5	6.5	3.5	5	0.5	50	6.5	6.5	3.5	5	0.5	50	6.5	6.5	3.5	5	0.5	50
0.0047	472	6.5	6.5	3.5	5	0.5	10	6.5	6.5	3.5	5	0.5	15	6.5	6.5	3.5	5	0.5	50	6.5	6.5	3.5	5	0.5	50	6.5	6.5	3.5	5	0.5	50
0.0056	562	6.5	6.5	3.5	5	0.5	10	6.5	6.5	3.5	5	0.5	15	6.5	6.5	3.5	5	0.5	50	6.5	6.5	3.5	5	0.5	50						
0.0068	682	6.5	6.5	3.5	5	0.5	10	6.5	6.5	3.5	5	0.5	15	6.5	6.5	3.5	5	0.5	50	6.5	6.5	3.5	5	0.5	50						
0.0082	822	6.5	6.5	3.5	5	0.5	10	6.5	6.5	3.5	5	0.5	15	6.5	6.5	3.5	5	0.5	50	6.5	6.5	3.5	5	0.5	50						
0.010	103	6.5	6.5	4.0	5	0.5	25	6.5	6.5	4.0	5	0.5	25	6.5	6.5	3.5	5	0.5	50	6.5	6.5	3.5	5	0.5	50						
0.012	123	6.5	6.5	4.0	5	0.5	25	6.5	6.5	4.0	5	0.5	25	6.5	6.5	3.5	5	0.5	50												
0.015	153	6.5	6.5	4.0	5	0.5	25	6.5	6.5	4.0	5	0.5	25	6.5	6.5	3.5	5	0.5	50												
0.018	183	6.5	6.5	4.0	5	0.5	25	6.5	6.5	4.0	5	0.5	25	6.5	6.5	3.5	5	0.5	50												
0.022	223	6.5	6.5	4.0	5	0.5	25	6.5	6.5	4.0	5	0.5	25	6.5	6.5	3.5	5	0.5	50												
0.027	273	6.5	6.5	4.0	5	0.5	25	6.5	6.5	4.0	5	0.5	25	7.5	9.5	3.5	5	0.5	30												
0.033	333	6.5	6.5	4.0	5	0.5	25	6.5	6.5	4.0	5	0.5	25	7.5	9.5	4.5	5	0.5	30												
0.039	393	6.5	6.5	4.0	5	0.5	25	6.5	6.5	4.0	5	0.5	25	7.5	9.5	4.5	5	0.5	30												
0.047	473	6.5	6.5	4.0	5	0.5	25	6.5	6.5	4.0	5	0.5	25	7.5	9.5	4.5	5	0.5	30	7.5	10	6	5	0.6	30						
0.056	563	6.5	6.5	4.0	5	0.5	25	6.5	6.5	4.0	5	0.5	25	7.5	9.5	4.5	5	0.5	30												
0.068	683	6.5	6.5	4.0	5	0.5	25	6.5	6.5	4.0	5	0.5	25	7.5	9.5	4.5	5	0.5	30												
0.082	823	6.5	6.5	4.0	5	0.5	25	6.5	6.5	4.0	5	0.5	25	7.5	9.5	4.5	5	0.5	30												
0.1	104	6.5	6.5	4.5	5	0.5	25	6.5	6.5	4.5	5	0.5	25	7.5	9.5	4.5	5	0.5	30												
0.12	124	6.5	6.5	4.5	5	0.5	25	6.5	6.5	4.5	5	0.5	25	7.5	10	5.0	5	0.5	30												
0.15	154	6.5	6.5	4.5	5	0.5	25	6.5	6.5	4.5	5	0.5	25	7.5	10	5.0	5	0.5	30												
0.18	184	6.5	6.5	4.5	5	0.5	25	6.5	6.5	4.5	5	0.5	25	7.5	10	6.0	5	0.5	50												
0.22	224	6.5	6.5	4.5	5	0.5	25	6.5	6.5	4.5	5	0.5	25	7.5	10	6.0	5	0.5	50												
0.27	274	6.5	6.5	4.5	5	0.5	25	6.5	6.5	4.5	5	0.5	25	7.5	11	7.0	5	0.5	50												
0.33	334	6.5	6.5	4.5	5	0.5	25	6.5	6.5	4.5	5	0.5	25	7.5	11	7.0	5	0.5	50												
0.39	394	6.5	6.5	4.5	5	0.5	25	7.5	6.5	4.5	5	0.5	25	7.5	12	8.0	5	0.5	50												
0.47	474	7.0	7.5	4.5	5	0.6	25	7.5	7.5	4.5	5	0.6	25	7.5	12	8.5	5	0.5	50												
0.56	564	7.0	8.5	5.0	5	0.6	25	7.5	8.5	5.0	5	0.6	25																		
0.68	684	7.0	8.5	5.0	5	0.6	25	7.5	8.5	5.0	5	0.6	25																		
0.82	824	7.0	8.5	5.0	5	0.6	25	7.5	10	6.0	5	0.6	25																		
1.0	105	7.0	10	6.5	5	0.5	25	7.5	10	6.0	5	0.6	25																		
1.2	125	7.0	10	6.5	5	0.6	20	7.5	11	7.0	5	0.6	20																		

■ RADIAL TAPING

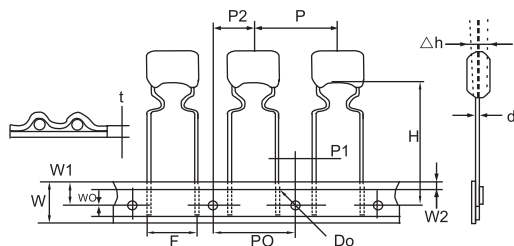


Fig. 1
F=5mm
(RT1)

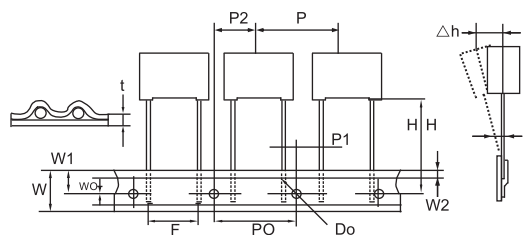


Fig. 2
F=5mm
(RT1)

■ PACKAGING

Method	Bulk	Ammo	Reel
Code	B	A	R

■ TAPE CODE (Lead spacing of tape)

Spacing	5mm
Packing	A or R
Code	RT1 (See Diagram)

■ TAPING SPECIFICATIONS

Description	Letter	Dimension (mm)
		RT1
Lead Wire Diameter	d	0.5 / 0.6
Tapping Pitch	P	12.7
Feed Hole Pitch	PO	12.7
Centering of the Lead Wire	P1	3.85
Centering of the Body	P2	6.35
Lead Spacing (Pitch)	F	5
Component Alignment	Δh	0
Height of Component from Tape Center	H	18.5
Carrier Tape Width	W	18
Hold Down Tape Width	WO	6
Hole Position	W1	9
Hold Down Tape Position	W2	3
Feed Hole Diameter	Do	4
Tape Thickness	t	0.7
Figure	fig	1 or 2

Remark: *Allowance of accumulated pitch less than 1mm at the sum of 20 pitches.

*Continuous empty component less than 3 consecutive pieces.

*Total empty on one reel less than 1%.