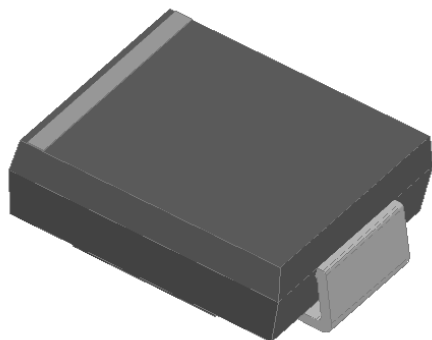


■ FEATURES

- Guardring for overvoltage protection
- Low forward voltage drop, Low power losses
- High forward surge capability
- High frequency operation
- Low forward voltage drop, Low power losses
- Solder dip 260 °C max. 10 s, per JESD 22-B106

■ TYPICAL APPLICATIONS

For use in low voltage high frequency inverters, freewheeling, DC/DC converters, and polarity protection applications.

■ MECHANICAL DATA

- Package : DO-214AB (SMC)
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- Terminals : Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Polarity: Color band denotes the cathode end

■ MAXIMUM RATINGS (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SSL34	SSL36	SSL310
Device marking code			SSL34	SSL36	SSL310
Repetitive Peak Reverse Voltage	V _{RRM}	V	40	60	100
Average Rectified Output Current @60Hz sine wave, Resistance load, T _a (FIG.1)	I _O	A	3.0		
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, T _a =25°C	I _{FSM}	A	60		
Storage Temperature	T _{stg}	°C	-55 ~+150		
Junction Temperature	T _j	°C	-55 ~+125	-55 ~+150	

■ ELECTRICAL CHARACTERISTICS (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	SSL34	SSL36	SSL310
Maximum instantaneous forward voltage drop per diode	V _F	V	I _{FM} =3.0A	0.45	0.5	0.6
Maximum DC reverse current at rated DC blocking voltage per diode	I _R	mA	T _a =25°C	0.5		
			T _a =100°C	50		
Typical junction capacitance	C _j	pF	Measured at 1MHZ and Applied Reverse Voltage of 4.0 V.D.C.	220	180	130

■ THERMAL CHARACTERISTICS (T_a=25°C Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	SSL34	SSL36	SSL310
Thermal Resistance	Junction to ambient	R _{θJA}	/W	48 ⁽¹⁾		
	Junction to lead	R _{θJL}	/W	13 ⁽¹⁾		

Note(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.6" x 0.6" (16 mm x 16 mm) copper pad areas

■ PACKAGING INFORMATION

PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SSL34~SSL310	F1	Approximate 0.252	3000	6000	42000	13" reel

■ CHARACTERISTICS (TYPICAL)

FIG.1: I_o-T_a Curve

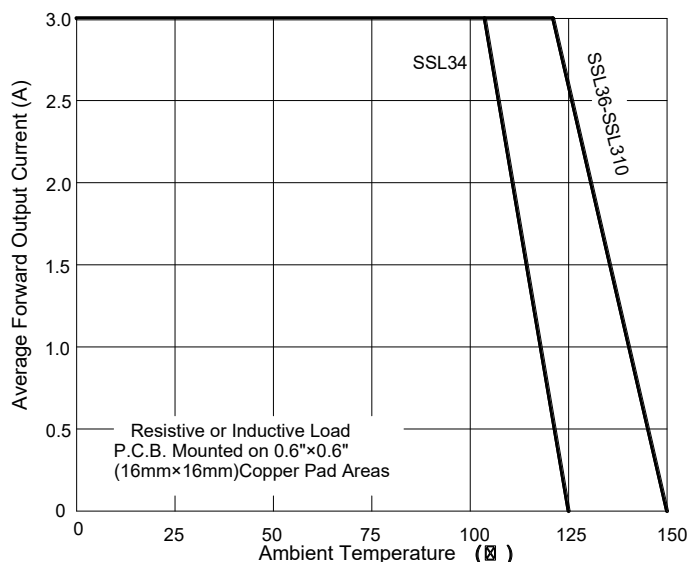


FIG.2: Forward Surge Current Capability

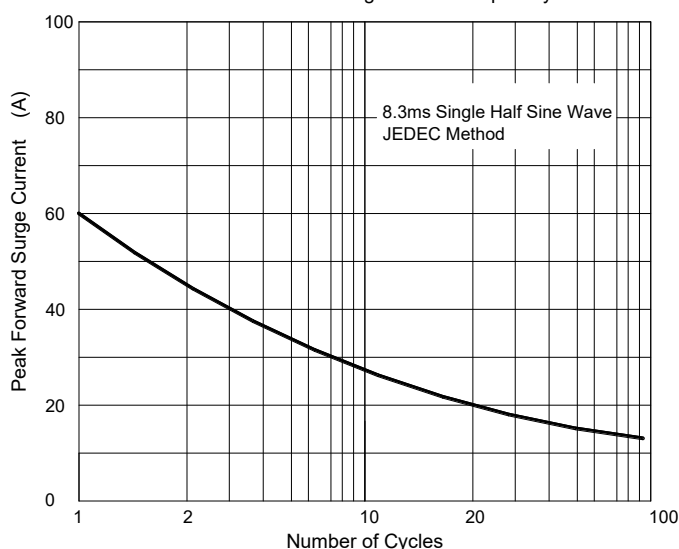


FIG.3: Forward Voltage



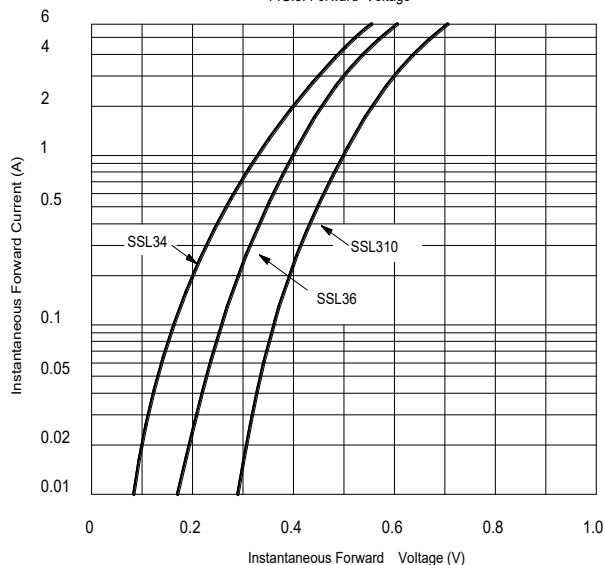


FIG.4: Typical Reverse Characteristics

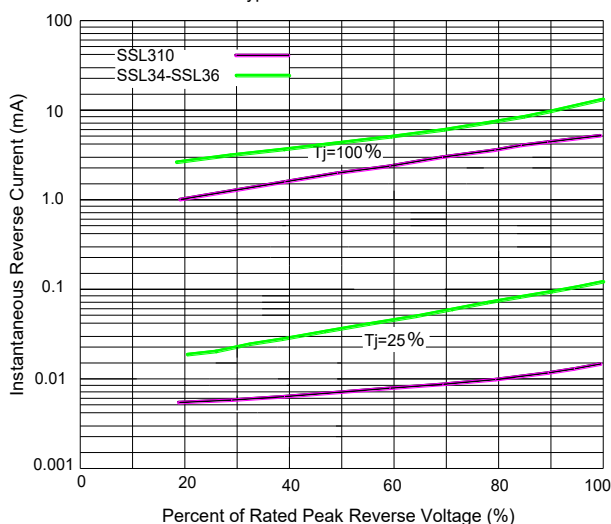


■ OUTLINE DIMENSIONS

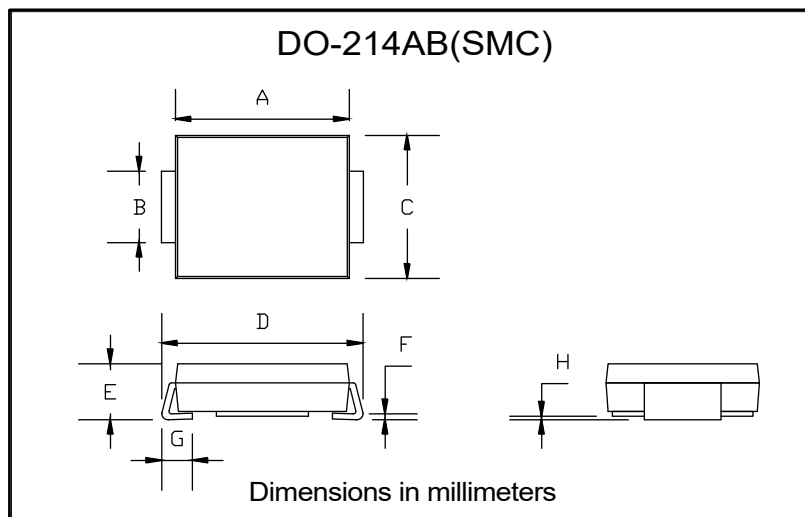

DO-214AB (SMC)		
Dim	Min	Max
A	6.60	7.11
B	2.85	3.27
C	5.59	6.22
D	7.75	8.13
E	1.99	2.61
F	0.15	0.31
G	0.76	1.52
H	0.10	0.20

■ SUGGESTED PAD LAYOUT

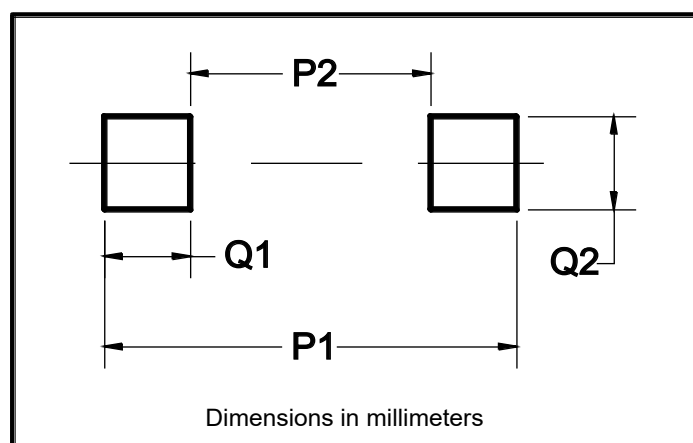

Dim	Typ
P1	9.9
P2	3.84
Q1	3.03
Q2	3.82